

## CBX065X12Fx10

X-Pol / 65° Az / 14.4 dBi

Wideband X-Pol




Electrical Specifications	695-896 MHz	
Frequency:	695-806 MHz	806-896 MHz
Gain:	13.7 dBi (11.6 dBd)	14.4 dBi (12.3 dBd)
Input Impedance:	50 ohms	
VSWR:	< 1.3:1	
Polarization:	X-Pol	
Electrical Downtilt (x):	0°, 4°, 8° *	
Azimuth Beamwidth:	65°	60°
Elevation Beamwidth:	20.5°	18.2°
1st Upper Sidelobe:	<-20 dB typical	
Front to Back Ratio:	>30 dB	
Inter-Port Isolation:	>25 dB	
Intermodulation:	<-153 dBc 3rd order for 20 W carriers	
Input Power:	2 x 750W	
Connector Type / Location:	2 x 7/16 DIN Female / Back **	
Operating Temperature:	-40°F (-40°C) to +140°F (+60°C)	

Mechanical Specifications		
Survival Wind Speed:	200 mph (321 km/h; 89 m/s)	
Wind Loads (100mph; 160km/h; 45m/s):	Front: 102 lbf (454 N)	Side: 60 lbf (265 N)
Antenna Weight and Dims (LxWxD):	18.9 lbs (8.6 kg)	48.0 x 12.0 x 7.1 in. (1219 x 305 x 180 mm)

Mounting Kit Options		
Pole Mounting Kit:	MKS04P01	Weight: 6.4 lbs (2.9 kg)
Scissor Tilt Mounting Kit:	MKS04T03	Weight: 9.0 lbs (4.1 kg)

\* Additional electrical downtilt options are available upon request.  
 \*\* Bottom feed connection is also available by request.

### Typical Patterns:

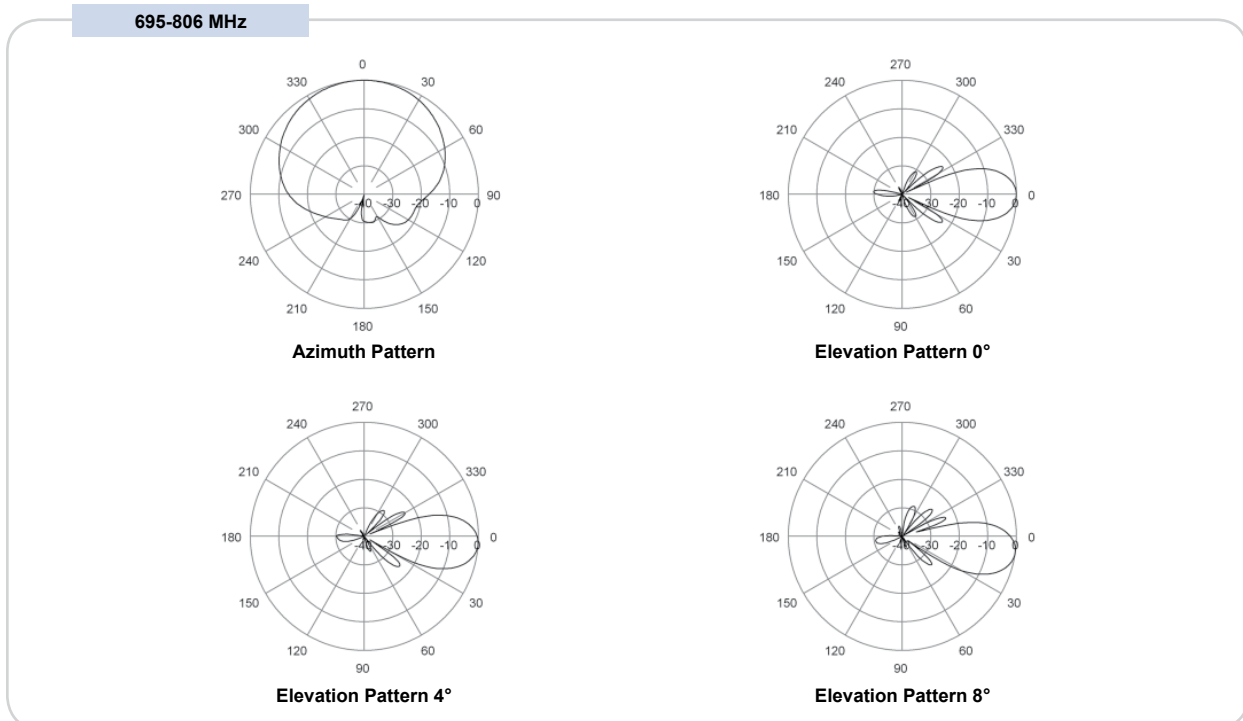


Issue 1008 - © 2008 JAYBEAM Wireless reserves the right to modify or amend any antenna or specification without prior notice.




**Typical Patterns (continued) - CBX065X12Fx10**


806-896 MHz




**Azimuth Pattern**



**Elevation Pattern 0°**



**Elevation Pattern 4°**



**Elevation Pattern 8°**